





# Fitting Instructions

## Top Track and Soft Close Bracket

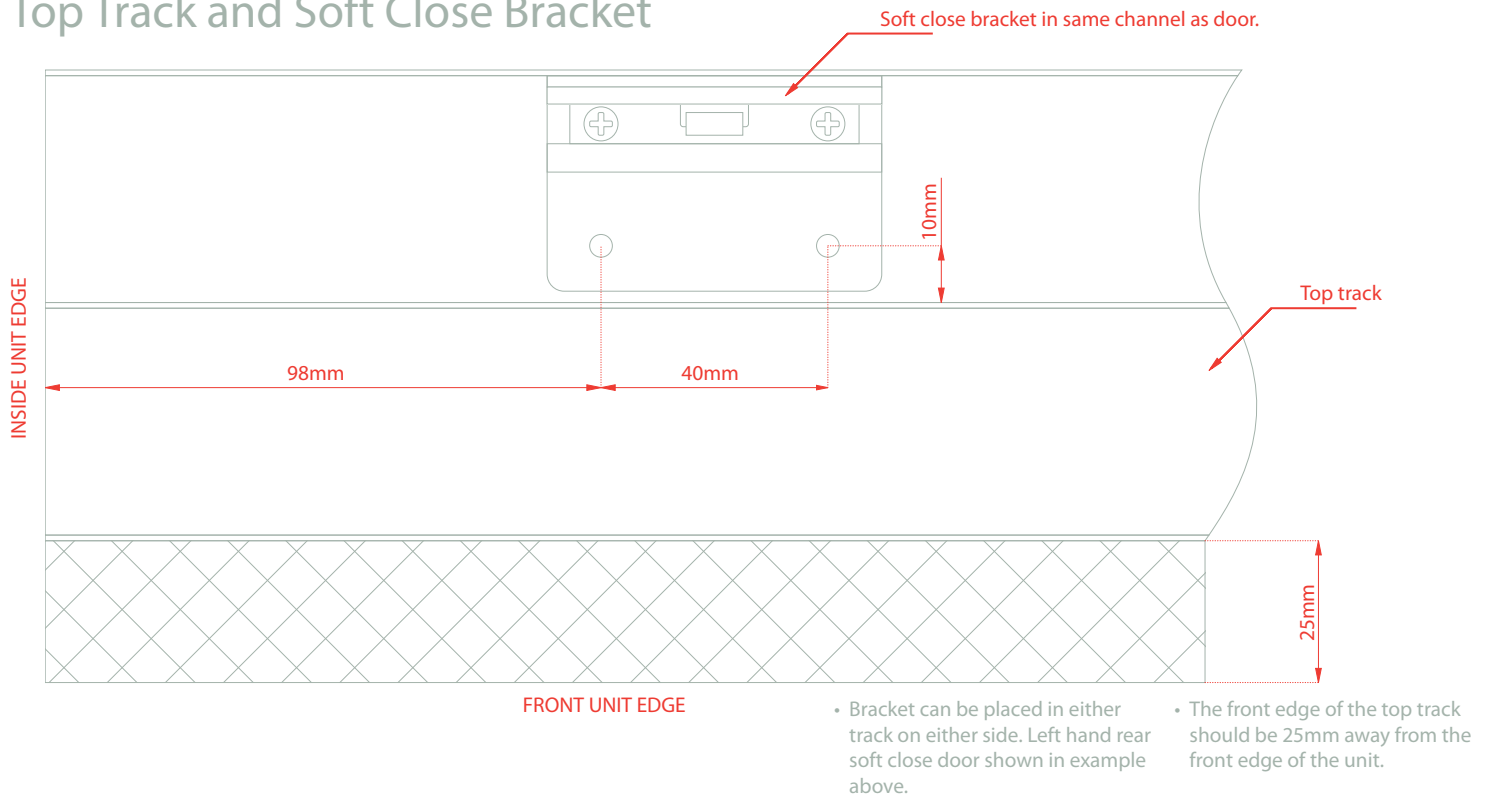

## Bottom Track

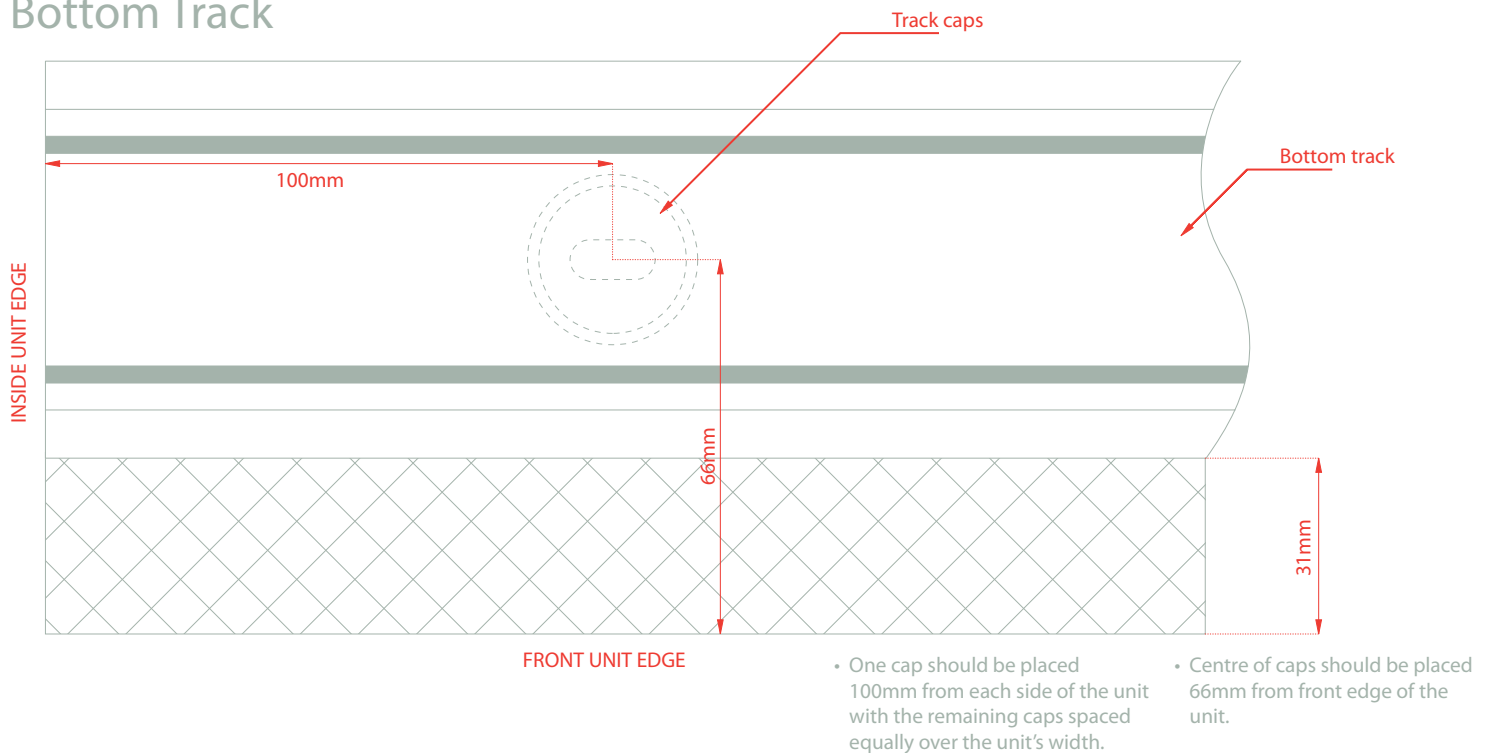

## Height Adjustment



- Lift the rubber seal.
- Using a 4mm allen key.
- The middle screw adjusts the height of the door.
  - Clockwise - Up
  - Anti-clockwise - Down



- Lift the rubber seal
- Using a 4mm allen key.
- The bottom screw locks the wheels into place once the height has been set.