


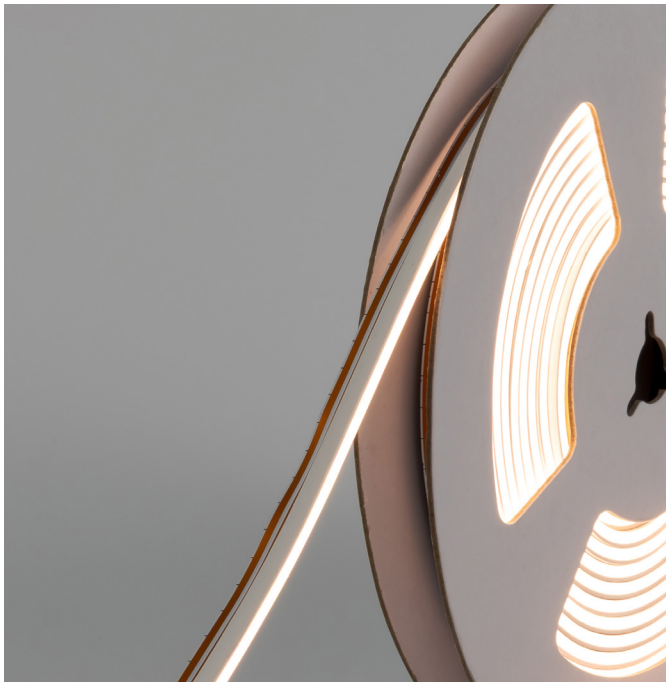

RAZOR X 4MM

Razor X 4mm is a chip-on-board (COB) lighting solution, protected by a design right, made for fast and clean installation. Its 4mm width fits perfectly into grooves made with standard saw blades, whether cut on-site or in the factory.

The flexible, edge-lit design allows the strip to bend around curves and corners with ease. Thanks to cut-anywhere technology, Razor X 4mm can be trimmed at any point without affecting light quality—eliminating waste and making it easy to customize to any project.

BENEFITS	
• Higher brightness , efficiency and eco-friendly	
• The COB has a high luminous efficacy, meaning it produces more light with less power	
• No waste (Cuttable at any length)	
• Longer lifespan and reliability	
• More flexibility and versatility	
• Registered design right: 6371779	

KEY FEATURES	
• Dimmable	
• Higher light density	
• High lumens per watt	
• High colour rendering index: >90	
• Available in warm and natural white	

TECHNICAL SPECIFICATION	
Wattage	6W/m
Voltage	24V
Lumens (Light output)	508 lm/m
Lumens per Watt	100
Colour temperature	Warm white: 3000K
	Natural white: 4000K
Beam angle	180°
Colour rendering index	>90
Connector	2.5m at each end
No. LEDs per meter	512
Operating temperature	-30°C to +45°C

PRODUCT NAME	ORDER CODE	BARCODE
Razor X 4mm - Warm White - 3m	SE00136	5060861240699
Razor X 4mm - Warm White - 5m	SE00139	5060861240729
Razor X 4mm - Warm White - 5m (Winged)	SE00160	5060861240804
Razor X 4mm - Warm White - 10m	SE00142	5060861240750
Razor X 4mm - Natural White - 3m	SE00137	5060861240705
Razor X 4mm - Natural White - 5m	SE00140	5060861240736
Razor X 4mm - Natural White - 5m (Winged)	SE00161	5060861240811
Razor X 4mm - Natural White - 10m	SE00143	5060861240767
ACCESSORIES		
Razor X 4mm - 2.5m Driver Connection Cable Kit	SE00145	5060861240781

MECHANICAL SPECIFICATION

PRODUCT NAME	DIMENSIONS (mm)	WEIGHT (grams)	IP RATING
Razor X 4mm - 3m	L 3000mm x W 10mm x D 3.8mm	160	IP20
Razor X 4mm - 5m	L 5000mm x W 10mm x D 3.8mm	260	IP20
Razor X 4mm - 5m (Winged)	L 5000mm x W 10mm x D 3.8mm (5.8mm with wings)	260	IP20
Razor X 4mm - 10m	L 10000mm x W 10mm x D 3.8mm	550	IP20