


INSTALLATION
INSTRUCTIONS

1 x BLUETOOTH
POWER SYSTEM
WITH HANGING
RAIL

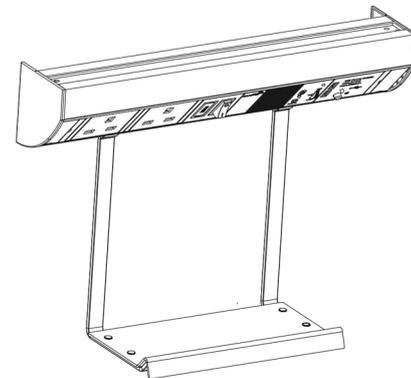


CODE: SE891920

IMPORTANT: Please read these instructions before commencing installation and retain for future reference.

Components


Tools Required

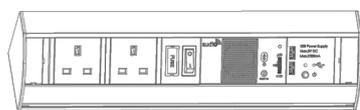


1 x Bluetooth Power System




Screws



1 x Hanging Rail & Screws



1 x Instructions

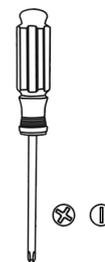

Screw Drivers



or Power Drill

Important Safety Information

Please read these instructions carefully before attempting to install this product. It is advisable to keep these instructions in a safe place for future reference.

We recommend that you consult a qualified electrician. All electrical installation must be carried out in accordance with current IEE wiring regulations (BS7671).

This product must not be modified, if any modification are made, it may invalidate the warranty and may render the product unsafe.

This product is to be used indoors only.

- Install on a smooth flat surface(s) only.
- This product is not protected against liquids, do not place close to water.
- 220-240V~50-60Hz
- Max. 13A

USB Charging Specification

- Output voltage: 5VDC.
- Output current: Max. 2100mA

Please note: 2100mA is split across two USB ports. When charging iPhones it is possible to use both ports. When charging iPads please only use one port.

Safety Instructions

1. Before commencing installation or maintenance, isolate the main electrical supply for the appropriate circuit at the fuse board.
2. This product is only suitable for connecting to a 240V 50Hz supply.
3. The product should be mounted onto a secure surface.
4. This is a Class I product and must be earthed.


Waste Electrical & Electronic Equipment (WEEE)

The symbol on the product, or on the document accompanying the product, the crossed out wheellie bin symbol, indicates that this product may not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic waste.




RoHS
Compliant ✓




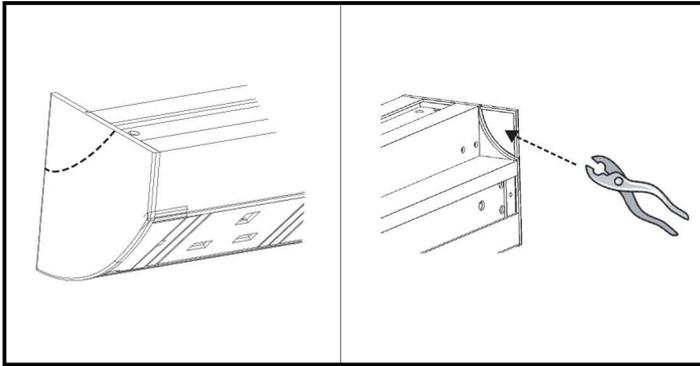


Measure and mark out a suitable location before commencing installation. If the input cable is unable to pass through the back side of the product then you should use a plier to remove the corner on the end cap. This way the cable can exit the side of the product.

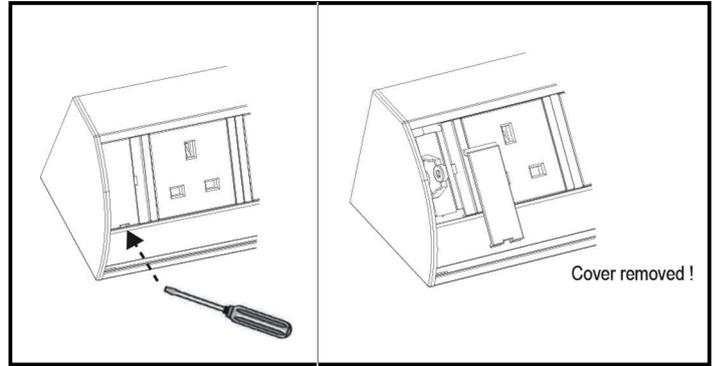


Remove the screw covers, located at both ends of the product, using a small screw driver.

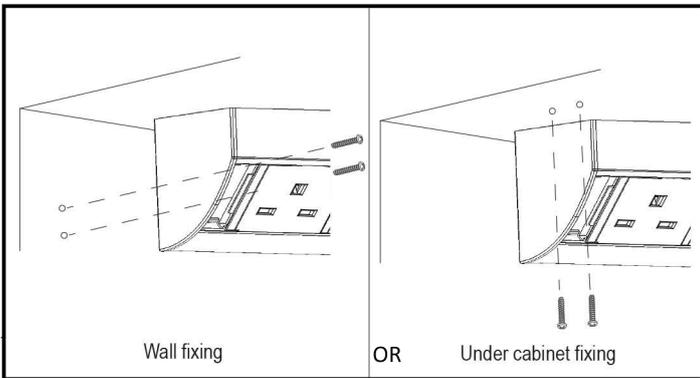

Using screws, fix the product to either the wall OR the underside the cabinet, as shown above. Ensure there are no obstructions within the mounting surface. Replace the screw covers. Connect to the mains supply and turn on the power.

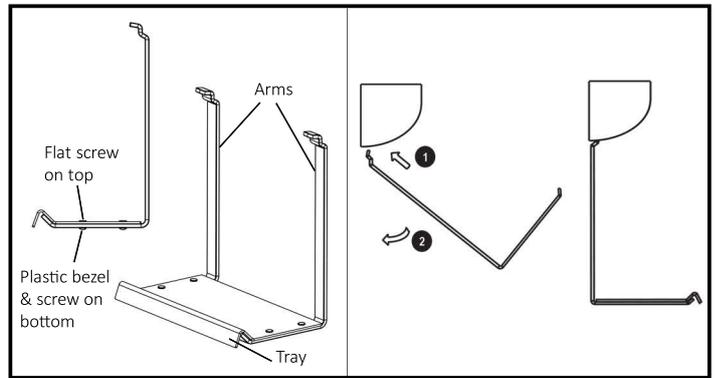

Use the appropriate screws provided to fix the hanging arms to the tray. Then to hang the shelf onto the product follow the diagram shown above.

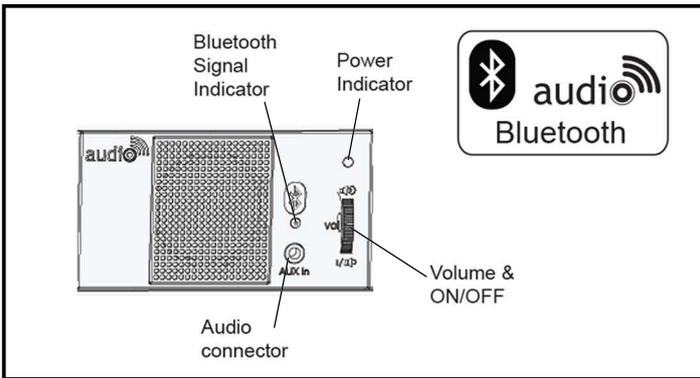

Audio Specification:

2W miniature audio speaker, Sensitivity at L/R380MV, SNR > 80db, Frequency range 280Hz-16KHz. Suitable for all music player with Bluetooth and 3.5mm headphone jack, include MP3, MP4, smart phones, iPhone 5, iPad.

To connect to Bluetooth, switch on the power, the bluetooth signal indicator will start flashing. Turn on the bluetooth function on your mobile device. Then connect to the device named 'SENSIO/KENGO'. On successful connection there will be a 'bip' sound and the signal indicator on the pod will flash at a different frequency. Select and play the music on your device.

Maintenance & Care

- Ensure that the power is disconnected prior to cleaning.
- To keep the finish of this product, wipe over with a soft cloth periodically.
- Do not use harsh chemical solvents, this may dis-colour or damage the finish.
- Clean the socket with a damp cloth and mild detergent, dry immediately.